



Nominal Height of Column	Planting Depth	Min. Door Opening
5m	1000m	500 x 100


COLUMN DETAILS

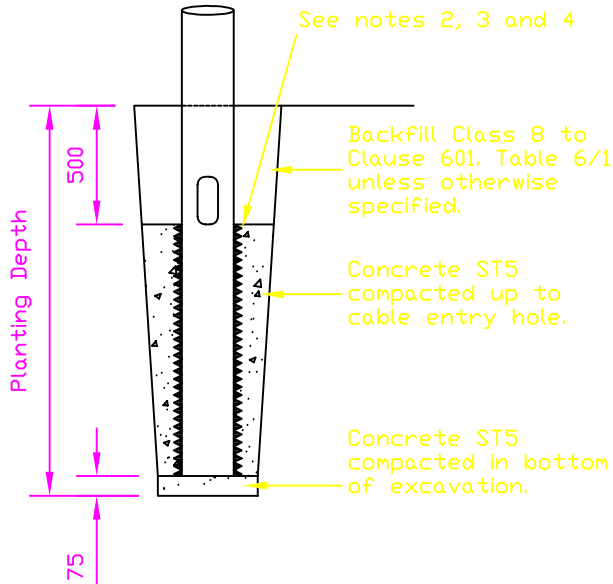


PLANTING DETAILS

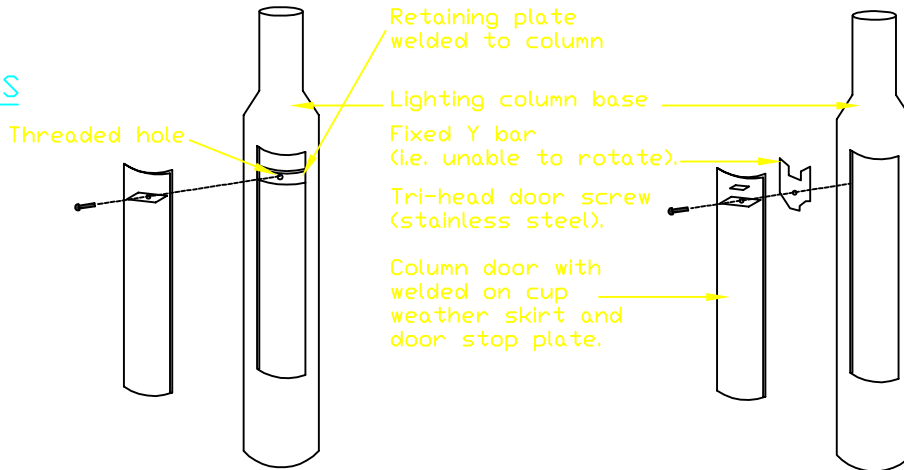

ALTERNATIVE ARRANGEMENT FOR DOOR OPENINGS

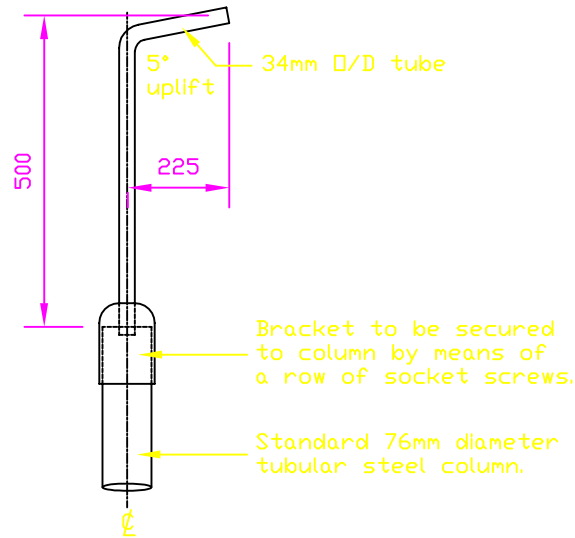

PROJECTION BRACKET SPIGOT CAP

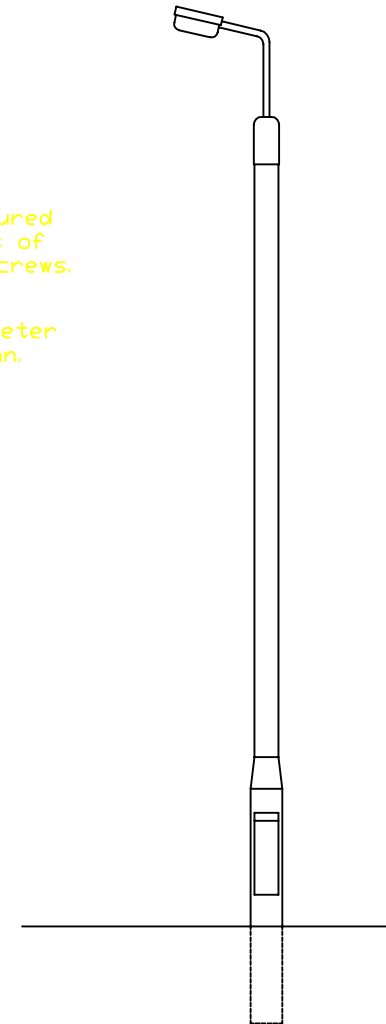

STANDARD COLUMN

NOTES

- All dimensions are in millimetres unless otherwise stated.
- Alternative Foundation. The contractor may use a polypropylene duct to form a socket type road.
- Duct to be high impact polypropylene a minimum of 30mm larger in diameter than column tube.
- Fast set cementitious grout to be placed between duct and column tube to grout column in place. (To achieve 40N/mm² in 3 days and 65N/mm² in 28 days).
- Door opening height to be 500mm or 600mm as specified by over-seeing organisation.

No.	Date	Description
↑ AMENDMENTS ↓		

Drawing No.
K80