



NOTES

1. All dimensions are in millimetres unless otherwise stated.
2. Alternative foundation. The contractor may use a polypropylene duct to form a socket type road.
3. Duct to be high impact polypropylene a minimum of 30mm larger in diameter than column tube.
4. Fast set cementitious grout to be placed between duct and column tube to grout column in place. (To achieve 40N/mm<sup>2</sup> in 3 days and 65N/mm<sup>2</sup> in 28 days.

A	Mounting height (m)	5	8	10	12
B	Planting depth (mm)	800	1200	1500	1700
C	Min. base tube diameter (mm)	140	165	177	202

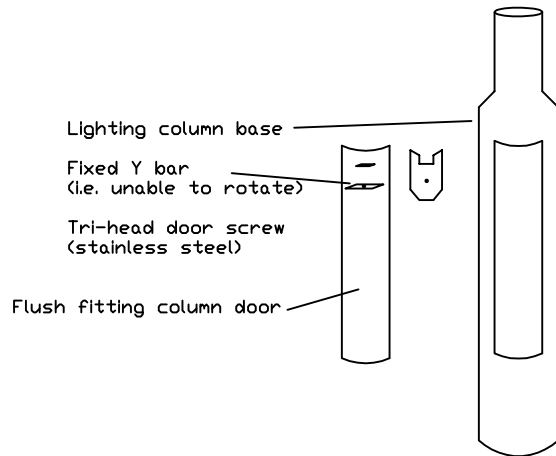

Cable entry slot  
150 x 50 excluding  
guard

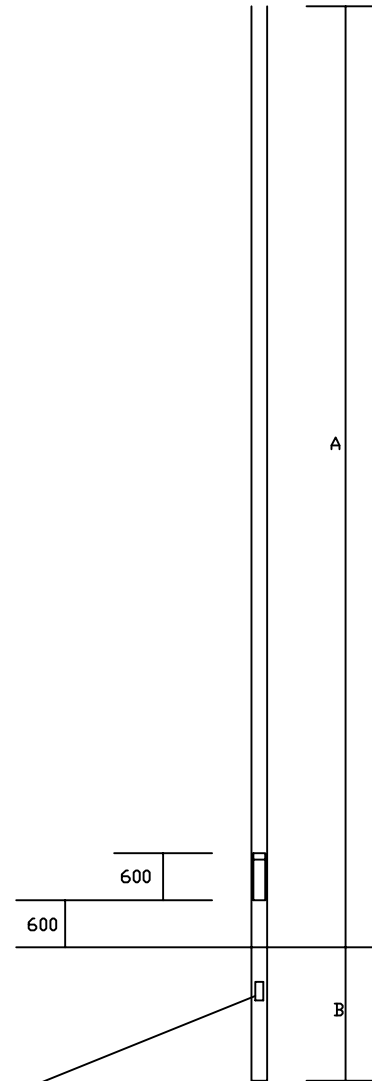

No.	Date	Description
↑		AMENDMENTS
		↓

HIGHWAY CONSTRUCTION DETAILS

ROAD LIGHTING

6000 SERIES ALLOY EXCLUDED  
LIGHTING COLUMN

Drawing No.

K89