



**NOTES**

1. All dimensions are in millimetres unless otherwise stated.
2. If required by the contractor poles may be placed directly into wet concrete.
3. For details of sizes of sign foundations see sign schedule.
4. Care to be taken when excavating foundation in the vicinity of existing services. Existing services to be split ducted and surrounded with 150mm sand. Work to be agreed with the utility prior to pouring concrete.
5. Unless otherwise described in the contract the mounting heights shall be : 2300 (Footpaths and Paved Areas), 1500 (Verges).
6. Clearance from kerb to the edge of the sign, Urban - min. = 0.5m, desirable = 1.0m, Rural - min. = 1.0m, desirable = 3.0m.

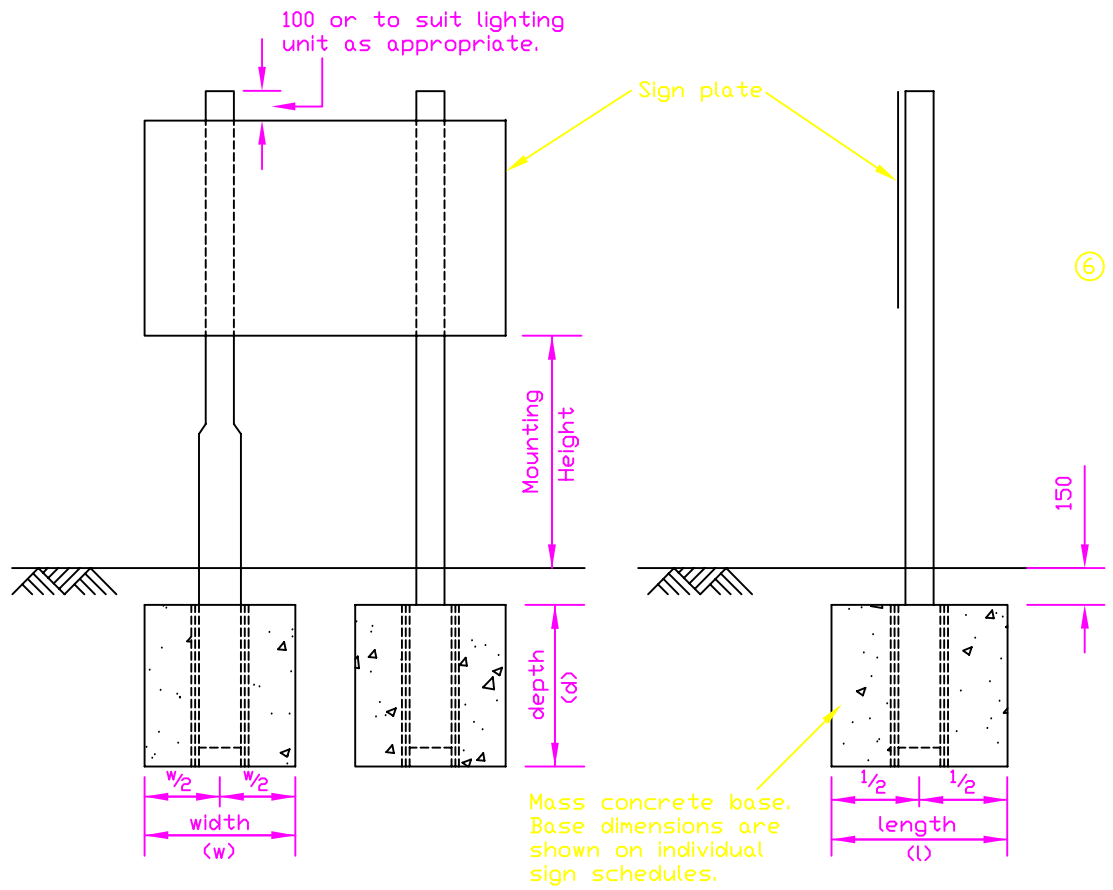

**TYPICAL ARRANGEMENTS OF POST BASES FOR LEVEL SITES**

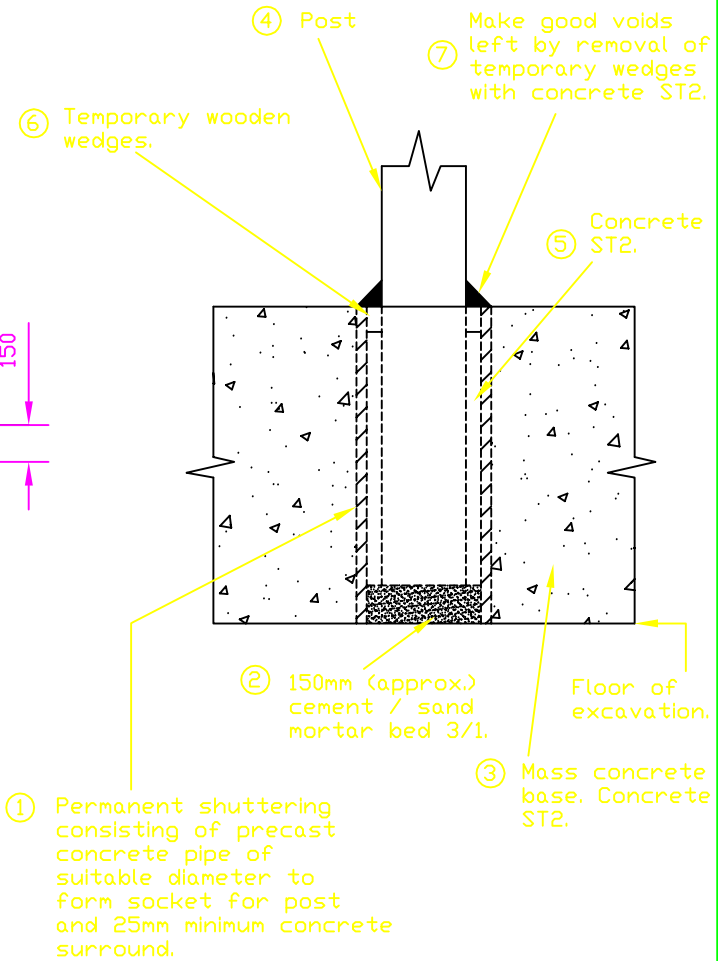

**STAGES IN THE ERECTION OF POSTS FOR LARGE SIGNS 1 - 7**

No.	Date	Description
AMENDMENTS		