




NOTES

1. All dimensions are in millimetres unless otherwise stated.
2. See typical layout of gullies for connection details.
3. Gully types :
G1 - Trapped
G2 - Untrapped
4. All road gully gratings and frames will require to be Kitemarked in accordance with Appendix B (Volume 1).
5. A 5mm thick steel 'fish' plate shall be used where support for a kerb log is required due to position of gully pot.

(See Note 3 for Gully Types)

Grating and frame to comply with BS EN124 : 1994 Class D400 (Double Triangular)
Set 6mm below road surface and to fall.
Frame to be 100mm deep.

Frame to be bedded on 10 to 20mm of Class 1 cement mortar.

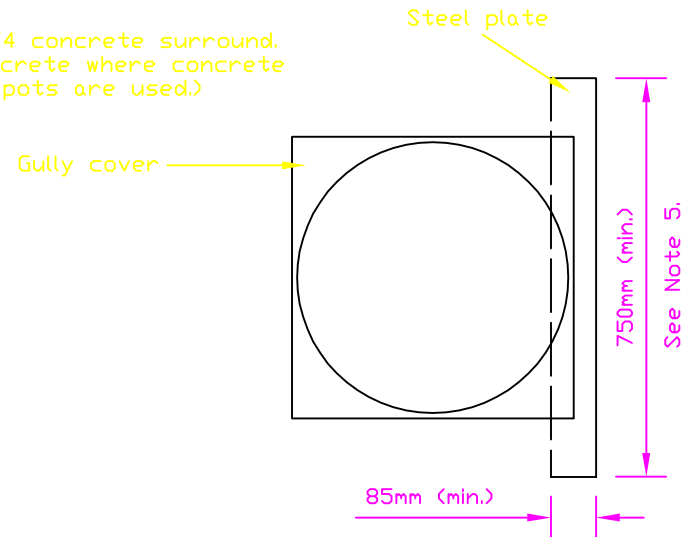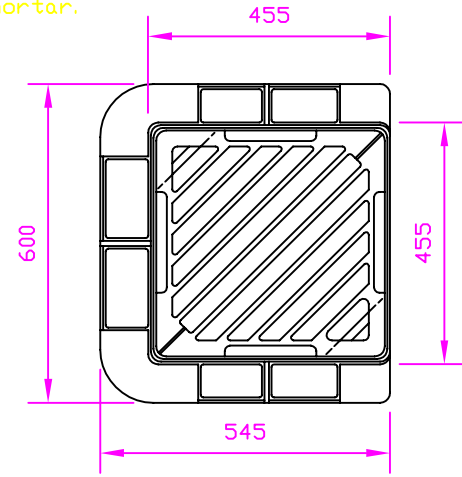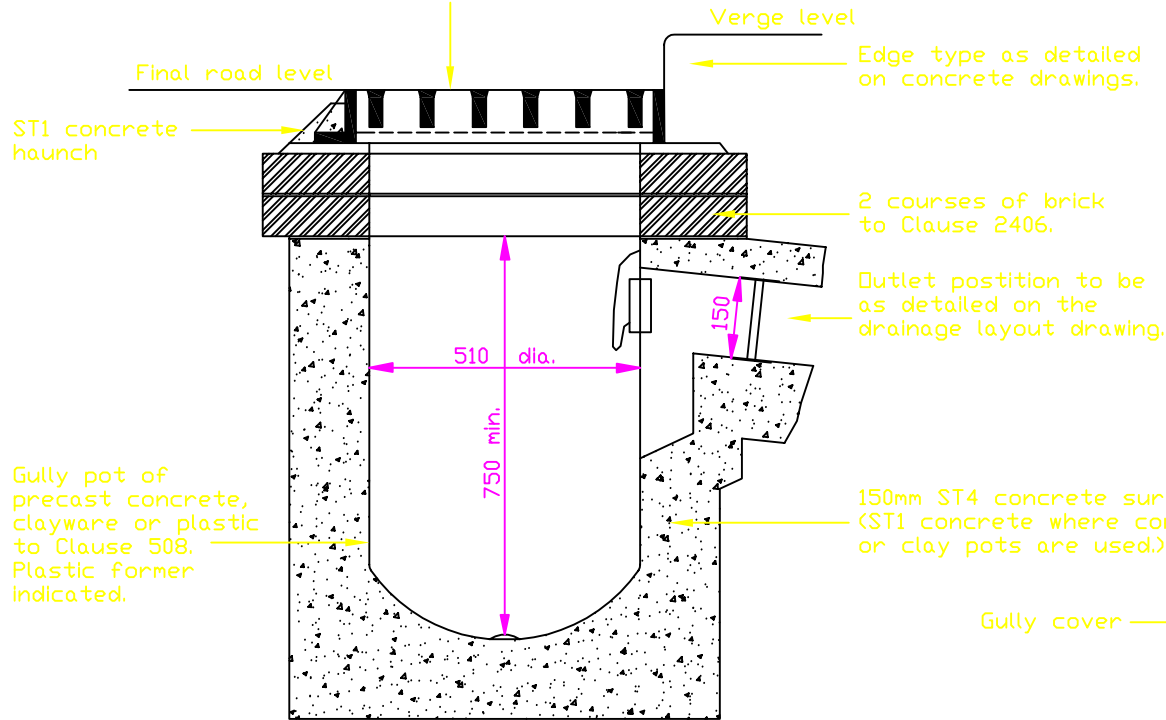

No.	Date	Description
AMENDMENTS		